

Flat duct bypass FLEXPBYPASS


Description

Flat duct bypass made of galvanised steel. 75 mm diameter connector are available. Self-sealing connector.

Technical specifications

Model	Connectors [pcs.]	The diameter of connectors [mm]
FLEXPBYPASS 1x75	1	1x75
FLEXPBYPASS 1x90	1	1x90

Technical drawing

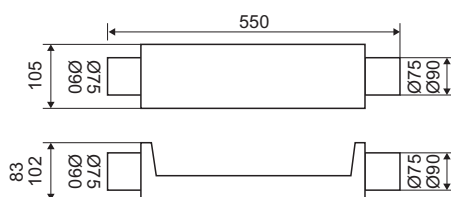

Box end cap FLEXO END



Description

The FLEXO END CUP is used to close unused connectors. Made of plastic.

Technical specifications

Model	Diameter [mm]
FLEXO END 75	75
FLEXO END 90	90

Duct link FLEXOLINK PRO



Description

The FLEXO DUCT LINK PRO connector is used to connect flexible FLEXO DUCT ducts. Made of plastic.

Technical specifications

Model	Diameter [mm]
FLEXOLINK PRO 75	75
FLEXOLINK PRO 90	90



Silencing damper FLEXODAMPER

Description

The dampers are made of polyurethane foam, used to regulate the flow and noise suppression in the installation. Air flow can be easily adjusted by changing the number of open holes in the damper. Several dampers should be used for greater damping. Polyurethane foam in the field of fire resistance meets the requirements of FMVSS-302.

Technical specifications


Model	Diameter [mm]
FLEXODAMPER 100	100
FLEXODAMPER 125	125
FLEXODAMPER 160	160
FLEXODAMPER 200	200
FLEXODAMPER 250	250

Corrugated duct cutter FLEXOCUTTER



Technical specifications

Model	Diameter [mm]
FLEXOCUTTER 75	75
FLEXOCUTTER 90	90



Flexible duct mounting FLEXOHOLDER

Technical specifications

Model	Diameter [mm]
FLEXOHOLDER 75	75
FLEXOHOLDER 90	90